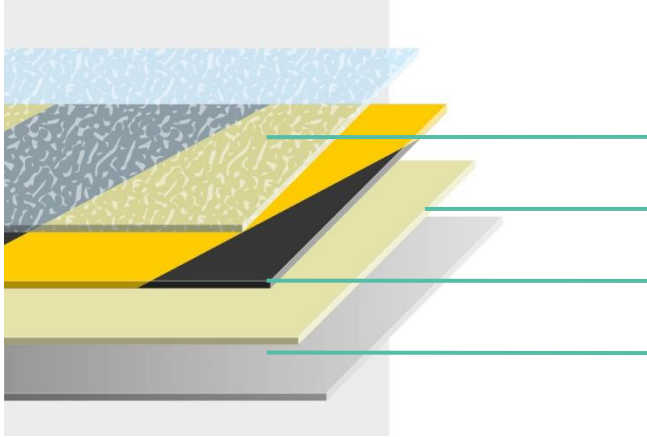


Technical Data

	Slip-resistant surface
	Permanent pressure sensitive adhesive
	Plain or printed vinyl film
	Cover paper
Colour	Transparent, black (ca. RAL 9004), yellow (ca. RAL 1023) and black-yellow hatched. Special colours and motifs on request
Material	Vinyl
Thickness (installed)	Transparent ca. 0,63 mm Yellow, black and black-yellow hatched ca. 0,75 mm
Weight (installed)	Transparent ca. 570 g/m ² Yellow, black and black-yellow hatched ca. 753 g/m ²
Temperature resistance	- 30 to + 60 °C (Adhesive strength changes with temperature)
UV-resistance	Good in Central European climates
Slip resistance According to DIN EN 16165 ann. B	R10
Adhesive strength / Medium peeling resistance after 24h following DIN EN 1939	Transparent ca. 25 N / 25 mm Black, yellow ca. 40 N / 25 mm Black-yellow hatched ca. 20 N / 25 mm
Dimensional stability after bonding following DIN ISO 2768	Tolerance class v

Storage and application instructions

The Safety-Floor Easy-to-Clean anti-slip covering can be used on all clean, dry, grease-free, even and closed surfaces. When applying a covering, it is recommended to round off the corners or use ready-made die-cut parts. The ideal installation temperature is 18 - 25 °C. Anti-slip coverings should not be glued over cracks, joints, damaged paint layers or rust (see also our installation instructions for anti-slip coverings). For porous or critical substrates (e.g. plastics and paints) as well as for outdoor use, we recommend the application of a primer. Please contact us for more information. The product is not designed for permanent use in wet conditions. Please do not use aggressive cleaning agents for cleaning. Storage should be dry, frost-free and clean. Ideally at temperatures of +10 to +20 °C and a humidity of 50 - 55 %. Protect material from heat and direct sunlight. The product should be installed as soon as possible and can be stored up to 6 months after the date of manufacture.

The above technical advice is given to the best of our knowledge and represents our current experience. As the use of our products is beyond our control, it is your own responsibility. All information about our products must be coordinated with the local conditions and the materials used in your application. Before use, carry out your own tests to determine suitability and consumption. All questions of warranty and liability for this product are governed by our current terms and conditions of sale, unless otherwise provided by law. We regard all technical data sheets of our products as our intellectual property. Their use is only permitted with our consent. With the publication of this product information, previous versions lose their validity.